
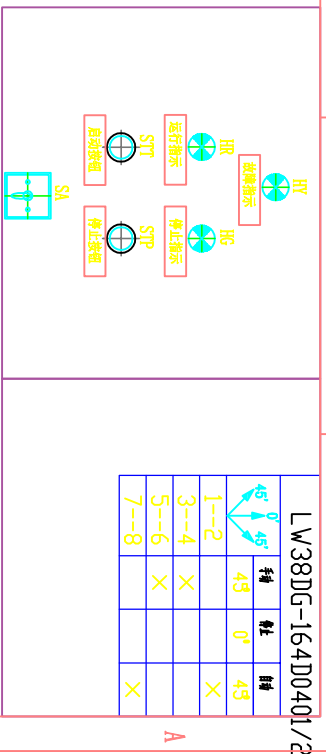


1. 柜体颜色: RAL7035;
2. 进出线方式: 电缆上下进出, 顶部和底部开橡皮圈孔;
3. 防护等级IP40;
4. 所有铜排需要套热缩管

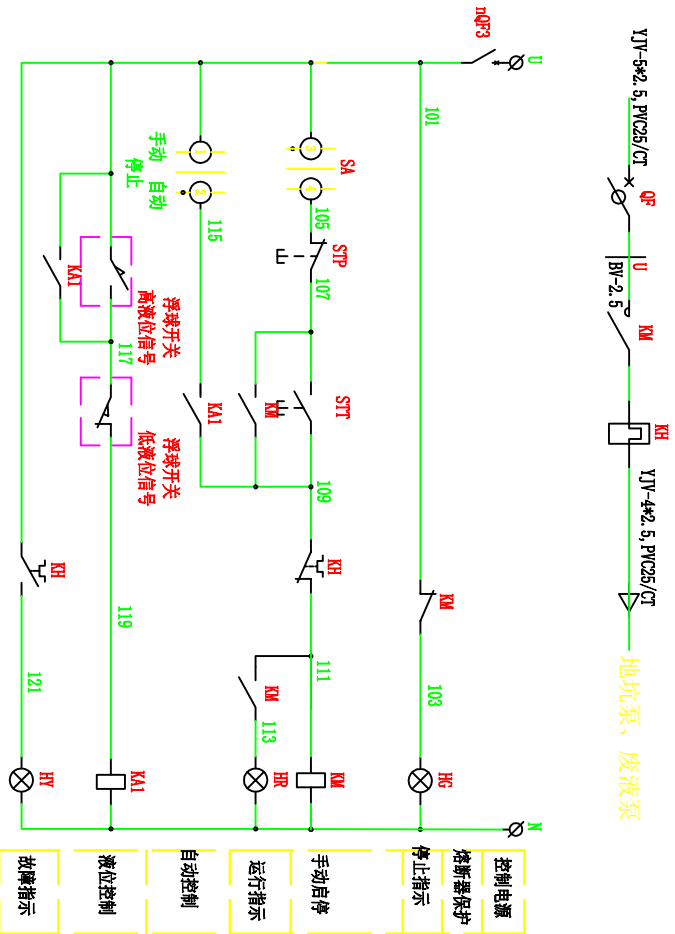

端子排	1	2	3	4	5	6	7	8
101								
117								
119								
N								
141								
143								
145								
147								
149								
151								

端子排 XT	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
101															
117															
119															
N															
141															
143															
145															
147															
149															
151															

序号	标号	名称	型号规格	数量	备注
13		接地线	φ6透明铜线	1	
12		零地排	T5(新)	2	
11	KAI	中间继电器	BR4C-A220+STP14A	1	芯子+底座
10	SPT	经济型按钮	LA38-11/2068 R	1	
9	SPT	经济型按钮	LA38-11/2068 G	1	
8	HY	指示灯	AD11-22/21-7G26 Y AC/DC220V	1	
7	HR	指示灯	AD11-22/21-7G26 R AC/DC220V	1	
6	HG	指示灯	AD11-22/21-7G26 G AC/DC220V	1	
5	SA	转换开关	LM380C-164D0401/2(手动/停止/自动)	1	
4	nQE3	微型断路器	BB2 6A/1P	1	
3	KH	热继电器	BR2-25/2 7*10A	1	
2	KM	接触器	BC2-1810 AC220V	1	配BR1-22辅助触头
1	QF	微型漏电断路器	BB2L-63/4P D10A, 30mA, 10kA	1	